


NK-7208

10/11th processor Q470/Q470E Chipset ATX Motherboard

特点 Feature

- Intel® 10/11th Generation Celeron/Pentium/Core-I series processor, TDP up to 125W
- Support dual channel(Non-ECC) DDR4-2933/3200MHz SO-DIMM slot , up to 64GB
- Support VGA,HDMI,DP Tri-Display
- 2 x Giga-bit Ethernet,
- 8 x USB3.0 ports, 5 x USB2.0 ports
- 2 x RS232/485, 4 x RS232
- 4 x SATA3.0 support software RAID 0,1,5,10, 1 x M.2-2242/2280 SATA/NVME(11th Gen. processors) Slot
- 2 x PCIEX16(1x 16 or 2x 8 link), 3x PCIE X 4, 2 x PCI slots

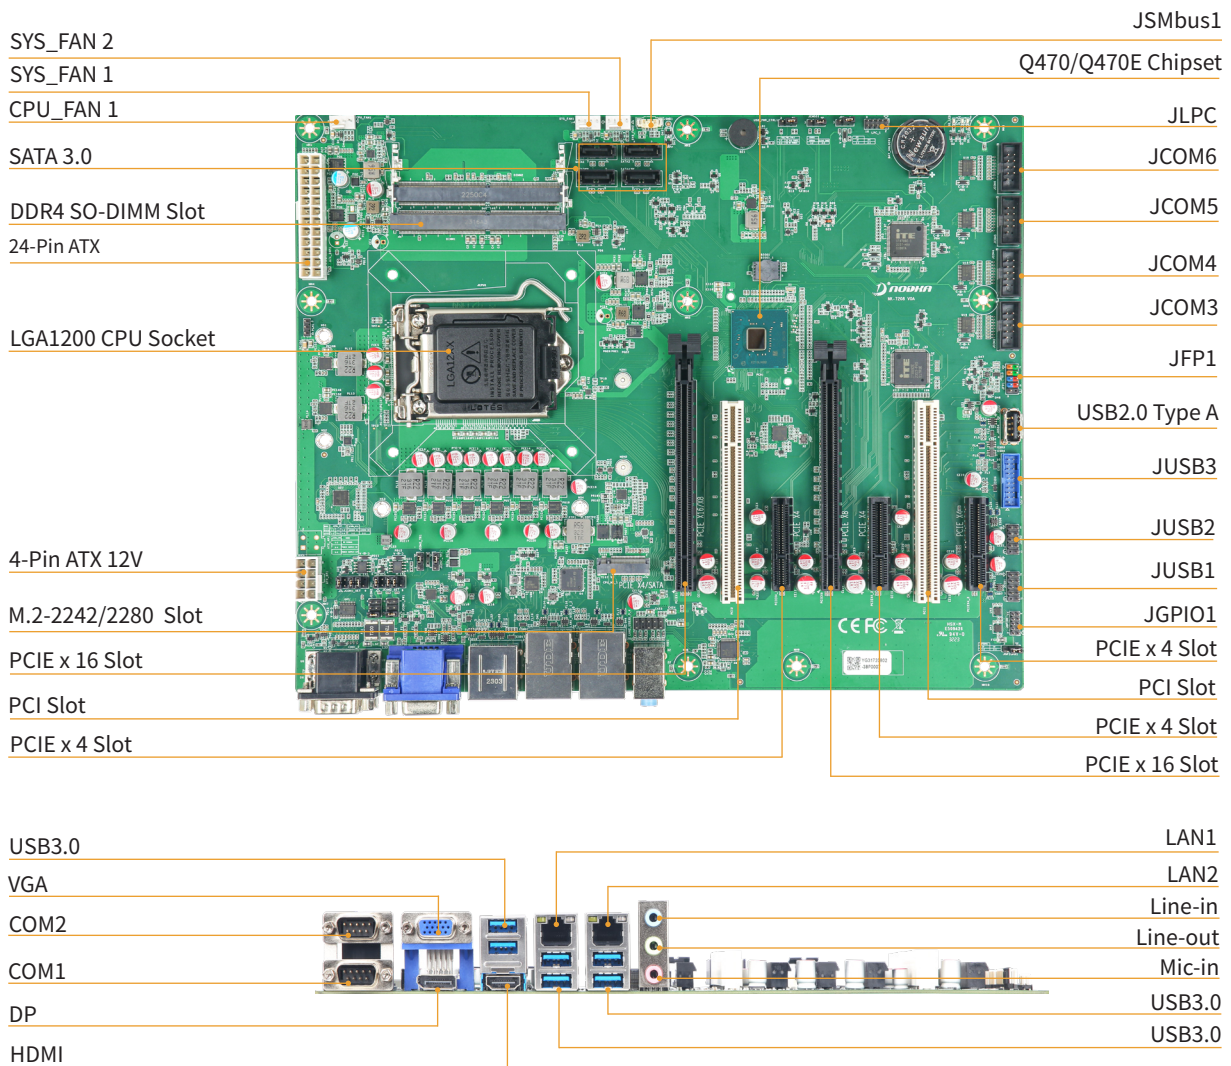

规格 Specification

处理器 Processor System	CPU	Intel® 10/11th Generation Celeron/Pentium/Core-I series processor, TDP up to 125W
	插槽 Socket	LGA1200
	芯片组 Chipset	Intel Q470/Q470E
	BIOS	AMI 256Mb UEFI BIOS
内存 Memory	技术 Technology	Dual Channel(Non-ECC) DDR4-2933/3200MHz, up to 64GB
	插槽 Slots	2 x 260-pin SO-DIMM slots
存储 Storage	SATA	4 x SATA3.0 (up to 6Gb/s) ,support RAID 0/1/5/10
	M.2 SSD	1 x M.2-2242/2280 Key M slot (SATA3.0/NVME(11th Gen. processors) Signal)
图形 Graphic	控制器 Controller	Intel HD graphics integrated
音频 Audio	编解码器 Codec	Realtek ALC 897 codec
外部接口 Rear I/O	显示 Display	1 x VGA, resolution up to 1920x1200@60Hz
		1 x DP, resolution up to 4096x2160@60Hz
		1 x HDMI, resolution up to 4096 x 2160@30Hz
	网络 Ethernet	2 x GbE(RJ45) ;LAN1: Intel i219-V controller ;LAN 2: Intel i210AT controller
	USB	6 x USB3.0(5Gbps)
	串口 Serial	2 x RS485/232
	音频 Audio	1 x Line-out, 1 x Mic-in, 1 x Line-in
内部接口 Internal I/O	USB	2xUSB3.0 Pin header(1x2*5pin),4xUSB2.0 Pin header,(2x2*5pin),1 x vertical USB2.0 type-A connector
	串口 Serial	4 x RS232 wafer(2*5pin)
	LPC	1 x LPC header(2*5pin)
	FAN	2 x System FAN (1*4pin),1 x CPU FAN (1*4pin)
	GPIO	1 x 8bit GPIO(2*5pin)
	SMBus	1 x SMBus wafer(2*5pin)
	FP	1 x FP(Power LED, HDD LED, Power button, Reset button)
扩展接口 Expansion Slots	PCIe X16	2 x PCIeX16(Gen3) slots (1 x 16 or 2 x 8(default) link)
	PCIe X4	3 x PCIeX4(Gen3) slots
	PCI	2 x PCI slots
看门狗定时器 Watchdog Timer	输出 & 间隔 Output & Interval	System reset, programmable from 1~255 sec
安全 Security	TPM	fTPM2.0
电源 Power	类型 Type	ATX Power Input: 24-Pin ATX + 8/12-Pin ATX 12V
操作系统 O.S Support	Microsoft Windows	Windows 10 /11
	Linux	Linux
机械参数 Mechanism	尺寸 Dimensions	(L)305mm x(W) 244mm
	净重 Gross Weight	0.8KG
环境 Environment	工作温度 Operating	0°C ~ 60°C
	存储温度 Storage	-40°C ~ 85°C
	相对湿度 Humidity	5~95% (Non-condensing)

订购信息 Order Information

料号 Part No.	型号 Model	描述 Description
F31.720801.10.NEK	NK-7208-Q470	ATX, Q470, 10/11th, 2*DDR4 SO-DIMM, M.2-2242/2280(SATA3.0/NVME), ATX power Input,

包装清单 Packing List

料号 Part No.	数量 Qty	描述 Description
KF0.001015.00.L54	2	Single COM port Cable(Length=500mm)
KF0.001025.00.L54	1	Single SATA Date Cable(Length=600mm)
L91.000076.00.G35	1	Single I/O Port Bracket

Note: Driver CD is not provided. Please visit Nodka support website for driver download.

可选配件 Optional Accessories

料号 Part No.	描述 Description
L45.000013.00.B14	LGA1151 2U CPU Cooler,TDP up to 125W
L45.000018.00.B14	LGA1151 4U CPU Cooler,TDP up to 125W
KF0.001015.00.L54	Single COM port Cable(Length=500mm)
KF0.001092.00.L54	Dual COM Cable with Bracket(Length=300mm)
KF0.001025.00.L54	Single SATA Date Cable(Length=600mm)
KF0.001091.00.L54	1 in 2*USB3.0 Type-A Y Cable with Bracket(Length=300mm)
KF0.001090.00.L54	1 in 2*USB2.0 Type-A Y Cable with Bracket(Length=300mm)
L91.000076.00.G35	Single I/O Port Bracket